

Morges, 19.03.2018

Technical note N°1/2018

A) Electronic B&G, CR App H

A custom forestay load pin linked with a hybrid loadcell amplifier (and their related wirings) are allowed. One 20/20HV display can be replaced by a H5000 graphic display positioned on the mast bracket.

The items are provided by Osprey through the RC44 Support teams.

The 2019 version of the CR will be updated accordingly

B) Max J definition


The J measure represents the horizontal longest distance for the foretriangle.

The J is measured from the backside of the forestay section in its most forward position, to the front side of the mast (excluding any track) at deck level in its most backward position (with enough tension in the runners).

The max J is defined at 5.140m measured at deck level with forestay in tension and mast in most backward position, from the backside of the forestay to the frontside of the mast section

The teams are allowed to modify the mast collar shape or mast collar position to reach the max J.

Should a team decide to do a modification on the boat, the work shall be documented. A report with picture shall be sent to the Class measurer. The new J shall be measured and recorded.

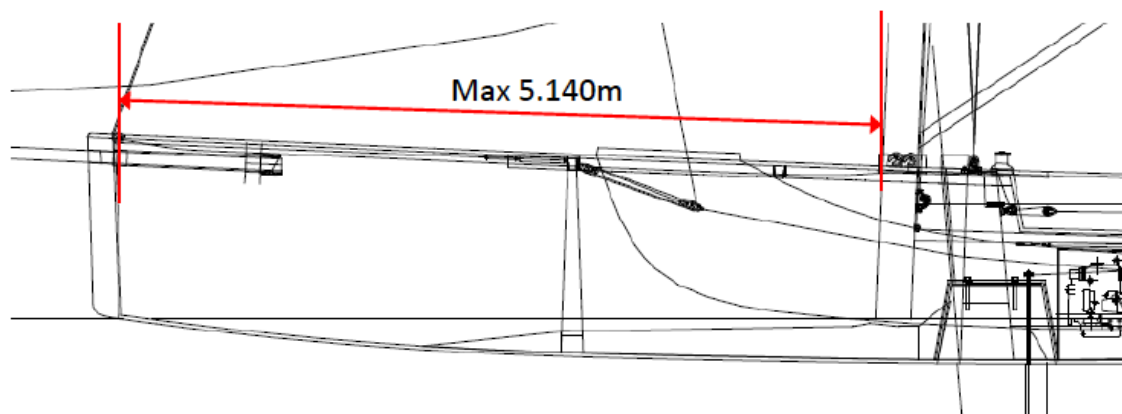

Bertrand Favre